

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
8 April 2004 (08.04.2004)

PCT

(10) International Publication Number
WO 2004/028639 A1

(51) International Patent Classification⁷: **A62B 18/08**

(21) International Application Number:
PCT/GB2003/004245

(22) International Filing Date:
29 September 2003 (29.09.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0222497.0 27 September 2002 (27.09.2002) GB

(71) Applicant (for all designated States except US): **THE SECRETARY OF STATE FOR DEFENCE** [GB/GB]; DSTL, Porton Down, Salisbury, Wiltshire SP4 0JQ (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **RICHARDSON, Grant, Stuart** [GB/GB]; DSTL, Porton Down, Salisbury, Wiltshire SP4 0JQ (GB). **ROWBOTHAM, Alex, Scott** [GB/GB]; DSTL, Porton Down, Salisbury, Wiltshire SP4 0JQ (GB). **WILLIAMS, Graham, Howell** [GB/GB]; DSTL, Porton Down, Salisbury, Wiltshire SP4 0JQ (GB).

(74) Agent: **BECKHAM, Robert, William**; D/TPR Formalities Section, Poplar 2, MOD Abbey Wood #2218, Bristol BS34 8JH (GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: RESPIRATOR

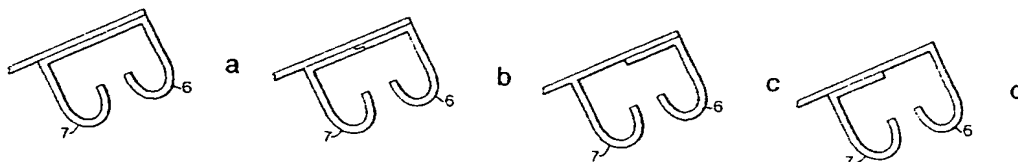

(57) Abstract: A respirator comprising a respirator facepiece (1), a first sealing means (7) suitable for forming a seal on the face of a user so as to define a first cavity between the first sealing means, the respirator facepiece and an area of the use's face comprising the eyes, mouth and nose, a second sealing means (6) suitable for forming a seal on the face of the user so as to define a second cavity, the second cavity being formed between the second sealing means (6), the first sealing means, a portion of the face of the user and optionally the respirator facepiece (1), a respirator air inlet (4) for conducting inhaling air to the first cavity, a respirator air outlet (3) for conducting exhaled air from the first cavity, and an air pressure supply means suitable for supplying pressurised air to the second cavity whereby in normal operation air is inhaled and exhaled solely through the first cavity and so substantially no air pressure differential exists between the ambient atmosphere and the second cavity which will allow ambient air to enter the second cavity.

WO 2004/028639 A1

THIS PAGE BLANK (USPTO)

RESPIRATOR

The present invention relates to the field of respirators, particularly, but not
5 exclusively, those used for protection against toxic chemical and biological agents.

Respirators were first developed in response to the use of chemical warfare agents in
the First World War. Nearly all respirators have several common features - a seal
suitable for forming a seal against the face, thus providing a cavity into which air is
10 inhaled via a filter that removes noxious materials from the inhaled air. The seal
prevents ingress of ambient, potentially foul, air into the cavity and thus into the lungs
of the wearer. Air is drawn into the cavity either by the negative pressure caused by
inhalation of the wearer or by the use of a positive pressure exerted, for example, by a
pump. The respirators also normally comprise some sort of eyepiece.

15

US 4574799 and GB 1587812 describe a respirator comprising both an oronasal mask
and an outer face-sealing mask, wherein, in use, the oronasal mask forms a seal
around the oronasal region of the face of the wearer and defines a cavity between
itself and the outer mask such that substantially no pressure difference forms between
20 the ambient atmosphere and the cavity between the oronasal mask and the outer mask
that would allow ingress of ambient air into the cavity formed between the seal of
outer mask and face and allows for compensation in the drop in pressure during
inhalation that may lead to ingress of unwanted material via disrupted seal.

25 WO 02/11816 discloses a dual cavity respirator similar to those described in US
4574799 and GB 1587812. The respirator of WO 02/11816 also comprises an ocular
mask in gaseous communication with the oronasal mask. The ocular mask protects

the eyes against potential damage should foul air enter the cavity between the outer mask and the oronasal mask. However, several problems have been experienced with such a respirator. It is difficult to incorporate the seals of the ocular and oronasal masks into the relatively small area defined by the size of the face of the wearer and so construction of the respirator is relatively complex and expensive. Furthermore, it is difficult to develop a seal on the ocular mask that fits all users due to the large variation of head and face shapes.

The respirator of the present invention seeks to overcome some or all of these problems.

Accordingly, in a first aspect of the present invention, there is provided a respirator comprising a respirator facepiece, a first sealing means suitable for forming a seal on the face of a user so as to define a first cavity between the first sealing means, the respirator facepiece and an area of the user's face comprising the eyes, mouth and nose, a second sealing means suitable for forming a seal on the face of the user so as to define a second cavity, the second cavity being formed between a portion of the face of the user, the second sealing means, the first sealing means and optionally the respirator facepiece, a respirator air inlet for conducting inhaling air to the first cavity, a respirator air outlet for conducting exhaled air from the first cavity, and an air pressure supply means suitable for supplying pressurised air to the second cavity whereby in normal operation air is inhaled and exhaled solely through the first cavity and so substantially no air pressure differential exists between the ambient atmosphere and the second cavity which will allow ambient air to enter the second cavity.

In use, the respirator provides a positive pressure in the cavity between the breathing cavity and the ambient atmosphere such that, should the second sealing means fail, then the positive pressure in the outer cavity urges air away from the point of failure of the seal, thus reducing the likelihood of ingress of contaminant into the respirator.

5

The first and second sealing means may comprise discrete components, which are separate from each other. Preferably, however, they share a common portion.

In a second aspect of the present invention, therefore, there is provided a sealing piece
10 for a respirator, the sealing piece comprising first and second portions, each comprising a substantially compliant material and each having a respective sealing surface suitable for engagement with the face of the user, the first and second portions being mutually connected by a third portion suitable for attachment to the surface of a respirator, the sealing piece further comprising a gas inlet for allowing, in use, the
15 supply of pressurised gas to the cavity, and wherein the first and second portions are so shaped that, in use, the application of a positive pressure in the cavity does not cause seals to be broken.

The sealing means or sealing piece may be adapted for increasing sealing contact
20 under the influence of the air pressure supply. For example, the first and/or second sealing means or portions may comprise a reverse reflex seal. In particular, the first and/or second sealing means or portions may be J or U shaped in cross section.

Alternatively, or additionally the first and/or second sealing means or portions may be
25 associated with or include a respective bladder, inflatable by the air pressure supply,

which urges the sealing surface in contact with the face. It will be understood that the bladder will be located at, adjacent or integral to the non-contacting surface of the sealing means.

- 5 In a particularly preferred embodiment the second sealing means or portion includes a bladder or is associated with a bladder.

It will be understood that the sealing piece of the second aspect may be used with the respirator of the first aspect of the present invention.

10

- The respirator preferably also comprises at least one eyepiece and a means for directing inhaling air over said at least one eyepiece. The inhaling air helps to demist the eyepiece and/or prevent misting from occurring. The means for directing inhaling air over said at least one eyepiece may additionally be capable of directing some of the inhaling air directly to the oronasal region of the user. One such means comprises a baffle plate.
- 15

- The respirator may further comprise exhaust deflection means capable of preventing exhaled air from contacting said at least one eyepiece. Exhaled air is warm, and unless inhibited, tends to rise over the eyepiece if the user's head is in an upright position. The exhaled air may be moisture-laden and could cause the eyepiece to mist. An exhaust deflection means is therefore of benefit to the user.
- 20

- The exhaust deflection means may comprise a third sealing means that, in use, engages with the face of the user so as to form ocular and oronasal cavities, the third
- 25

sealing means being provided with means for permitting gaseous flow from the oronasal cavity to the ocular cavity. The means for permitting gaseous flow from the oronasal cavity to the ocular cavity may take the form of a diffuser and/or merely passages in the third sealing means. The third sealing means should be arranged to
5 allow airflow from the ocular cavity to the oronasal cavity.

It will be realised that, the first and second air inlets may advantageously share a common filter connection means and filter

10 Accordingly, in a third aspect, the present invention provides a respirator comprising a first sealing means suitable for forming a seal on the face of the a user so as to form a first cavity, the first cavity containing the oro-nasal region of the user, a second sealing means suitable for forming a seal on the face of a user so as to form a second cavity, an air pressure supply means in gaseous communication with a first air inlet
15 and capable, in use, of providing gas to the second cavity, thus forming the first gaseous pathway, a second gaseous inlet which, in use, is in gaseous communication with the first cavity, thus forming a second gaseous pathway, the first and second air inlets being located in a common filter connection means, wherein the filter connection means is connectable to a suitably adapted filter such that in use the first
20 and second gaseous pathways are mutually isolated so that inhalation by the user does not substantially affect the pressure in the first gaseous pathway.

This arrangement provides clean inhaled air and clean air to be supplied by the air pressure supply means through one respirator connection without increasing the work
25 to be done by the air pressure supply means.

In prior art dual cavity respirators, a first sealing means is used to generate a first cavity that contains the oro-nasal region of the user, while a sealing means is used to define a second cavity, usually a space between the first sealing means, the second sealing means, the face of the user and the main body of the respirator. An air pressure supply means such as a bellows or electrical pump is used to provide the second cavity with pressurised air. This maintains a positive pressure in relation to the ambient atmosphere and, in the event that the second sealing means fails, then air from inside the second cavity urges out to the ambient atmosphere, reducing the likelihood of ingress of contaminated ambient atmosphere. The air pressure supply means has been arranged so as to draw air from the clean air that is to be inhaled into the first cavity as shown in WO 02/11816.

This simple prior art system has the disadvantage that, on inhalation, the air pressure within the first cavity falls. The air pressure supply means is a constant volume pump that attempts to maintain a constant flow of air through a pump. A drop in pressure within the first cavity causes the pump to experience a drop in air pressure at the air intake of the pump, thus causing the pump to increase its work rate in order to try to maintain the constant flow of air into the second cavity. This reduces the battery life of the pump. Attempts were made to alleviate the problem of the respirator of the prior art. For example, the pump was arranged such that it would only function on exhalation of the user. However, this did not provide a satisfactory pressure in the second cavity throughout the whole breathing cycle of the user. In an alternative attempt to solve the problem of the prior art, the inlet to the pump was arranged to have a separate air intake and filter, divorced from the inhalation air pathway. The pump was provided with its own filter. While satisfactory in some respects, this

embodiment requires two separate filters and does not provide a satisfactory solution to the problem associated with the prior art.

In a fourth aspect, the present invention also provides a filter for a respirator, the filter
5 comprising an inlet for the intake of a gas to be filtered, the inlet being in a gaseous communication with a plurality of mutually discrete filtration zones, each filtration zone comprising a filtration material capable of removing unwanted species from the gas to be filtered wherein each filtration zone is in gaseous communication with an outlet, each outlet being in gaseous communication with only one filtration zone, the
10 outlets being located in a common respirator connection means.

It is preferred that the first filtration zone is of a circular section and the second filtration zone is of an annular section, the first filtration zone fitting snugly with the second.

15

It is preferred that the third and fourth aspects are used with first and second aspects of the present invention.

In any case the air pressure supply means may be electrically operated. For example,
20 in a preferred embodiment, the filter connection means may include safety interlock means so that the air pressure supply is not operable unless a suitably adapted filter is fitted.

Preferably, the safety interlock means comprises an electrical arrangement. Thus, one
25 or more electrical contacts on the filter connection means may be provided for

electrical communication with the air pressure supply means. The filter may also comprise one or more electrical contacts suitable for electrical communication with the contacts of the filter connection means so as to form a completed electrical circuit, thus permitting the air pressure supply to the respirator.

5

In the absence of the filter the air pressure supply means is left in an open circuit mode and thus the air pressure supply means cannot operate. This also prevents the operation of the air pressure supply means when an inappropriate filter is fitted to the respirator. The safety interlock may alternatively and additionally be mechanical.

10

The respirator of the present invention may advantageously include an improved valve assembly, which offers superior protection over valves of prior art respirators. The improved valve assembly utilises the suggestion of WO 02/11816 that a purging airflow around the base of a valve assembly can reduce the likelihood of ingress of contaminated and/or exhaled air.

15

In a fifth aspect, therefore, the present invention provides a valve assembly comprising a valve body having a valve assembly outlet and a valve assembly inlet, and a valve cavity therebetween, a valve mechanism for permitting gaseous flow through the valve assembly inlet into the valve cavity and to the valve assembly outlet, a continuous purge outlet means connectable to an air pressure supply means, an air deflation means spatially arranged in the valve cavity relative to the valve mechanism and the purge outlet means such that, on connection and activation of a suitable air pressure supply means, air is emitted from the purge outlet means and is

20

incident on the air deflection means such that a curtain of air may be substantially maintained above the valve mechanism.

The valve assembly in this aspect of the present invention embodies the prior art
5 concept by including a purge outlet means connectable to an air pressure supply means and air deflection means providing a curtain or air above the valve mechanism. The air deflection means prevents air from mixing in the immediate vicinity of the valve mechanism and thus causing potentially harmful turbulent flow.

10 For the avoidance of doubt, it is hereby stated that the air pressure supply means is not part of the valve assembly; the purge outlet is merely connectable to an air pressure supply means. Further, as used herein, the term a "curtain of air" means a substantially unidirectional flow at any given point in the flow path for as long as the air pressure supply means is functioning.

15

Preferably, the purge outlet is positioned away from the valve mechanism such that, in use, the pressure experienced in the valve cavity in the immediate vicinity of the valve mechanism does not cause the valve mechanism to allow air flow from the valve cavity through the valve inlet to the interior of the respirator.

20

The interior of the valve body is preferably provided with a cylindrical bore, with the valve assembly inlet being situated at or near one end of the bore. With the cylindrical bore, the purge outlet means conveniently comprises an annular outlet around the circumference of the bore. If the purge outlet means is of an annular

shape, then it is also preferred that the air deflection means comprises a hollow or solid cylinder.

The purge outlet may be in gaseous communication with a manifold. Preferably, the manifold is of a sufficiently large volume to assist in the maintenance of a curtain of air above the valve mechanism.

The valve assembly may be provided with a plurality of outlet conduits, each outlet conduit providing a tortuous outlet path to the valve assembly outlet. The cross-section of the gaseous pathway defined by each conduit decreases nearer the valve assembly outlet. This causes acceleration of the gas away from the outlet. It is further preferred that the valve assembly comprises anti-swirl vanes that reduce the cyclonic motion of any air that may enter the valve assembly. The anti-swirl vanes preferably project substantially radially from the air deflection means.

15

The valve assembly may be used in a respirator according to or including any aspect of the present invention. Of course, it will be apparent that it may also be used in any respirator although a means of supplying pressurised air must also be provided.

20 The present invention will now be described by way of example only with reference to the following drawings in which

Figure 1 shows an anterior and posterior view of a respirator in accordance with the first aspect of the present invention;

Figure 2 shows a perspective view of a section of the sealing piece of Figure 1, which illustrates the second aspect of the present invention;

25

Figure 3 shows a schematic representation of how the sealing piece of the present invention may be constructed with respect to a respirator;

Figure 4 shows a section through a valve assembly in accordance with the fifth aspect of the present invention;

5 Figure 5 shows a schematic representation of a component part of the valve assembly of figure 4; and

Figure 6 shows a schematic block diagram of a respirator illustrating the first, third and fourth aspects of the present invention.

10 Referring now to Figure 1 a respirator in accordance with the first aspect of the present invention comprises a facepiece 1, eyepieces 2a and 2b, air outlet 3, air inlet 4, first seal 7, second seal 6, exhaust deflection means 8, attachment lugs 9, 10, air guide 11, air pressure supply means (not shown) and diffuser 12.

15 In use, the respirator is placed on the face of the user. The first seal 7 forms a seal on the face around part of the face comprising the eyes, nose and mouth, such that a first cavity is formed between the first seal 7, the facepiece 1 of the respirator and the face of the user. The second seal 6 forms an outer seal around the first seal 7 such that a second cavity is formed, the second cavity being defined by the first and second seals
20 and a portion of the face of the user. The air pressure supply means delivers pressurised air to the second cavity.

Air is inhaled and exhaled solely through air inlet 3 and air outlet 4 in the first cavity and so substantially no air pressure differential develops between the ambient

atmosphere and the second cavity, which will allow ambient air to enter the second cavity.

The eyepieces 2a and 2b are made from transparent material and are placed in suitably sized cavities in the facepiece 1 to permit the wearer to see out of the respirator when in use. The eyepieces may be separate as shown in Figure 1 or may be formed in one piece. The eyepieces 2a, 2b are sealed into the facepiece 1 to inhibit ingress of ambient gas through the join between the eyepieces 2a, 2b and the facepiece 1 into the interior of the respirator.

The exhaust deflection means 8 reduces the likelihood of warm, moisture-laden exhaled air from coming into contact with the eyepieces 2a, 2b. In this embodiment, the exhaust deflection means takes the form of a bar or strip of substantially compliant material that, in use, fits across the bridge of the nose and cheekbones of the user to substantially isolate the oronasal region of the user from the ocular region. The bar or strip is formed on the back of a substantially rigid skirt (not shown) that is attached to the facepiece of the respirator. The skirt allows air to pass from the oronasal region to the ocular region via diffuser 12. The bar or strip does not extend the whole width between the two sides of first seal 7. A small gap is formed between first seal 7 and the skirt to allow air to flow between the ocular region and the oronasal region. Not only does the exhaust deflection means 8 reduce the likelihood of exhaled air passing over the eyepieces 2a, 2b, but it also helps control the flow of demisting air over the eyepieces 2a, 2b and into the oronasal region.

In use, a filter (not shown) is mounted on the air inlet 4 and air is drawn through the air inlet 4 via the filter into the first cavity. Those skilled in the art will realise that the filter is not an essential element of this invention. Such filters are well known to those skilled in the art. Air may be drawn into the first cavity using negative or positive
5 pressure. In a negative pressure respirator, the breathing action of the wearer reduces the air pressure in the first cavity relative to the ambient atmosphere. Air is then drawn through the air inlet from the ambient atmosphere (preferably through a filter) into the first cavity and then into the lungs of the wearer. In a positive pressure respirator, a pump or a fan (not shown) draw air into the first cavity to maintain a
10 positive pressure therein.

Air drawn into the first cavity is directed by the air guide 11. The air guide 11 is a plastic duct attached to the facepiece 1 that diverts some of the inhaled air directly to the oronasal region of the user and some of the inhaled air to the gap in the exhaust
15 deflection means to the diffuser 12. The air guide 11 may be arranged such that all inhaled air is initially directed to the diffuser 12 into the ocular region. The diffuser 12 causes the inhaled air to be passed over the eyepieces 2a, 2b. The inhaled air thus helps to keep the eyepieces free of mist or steam. The air then passes through the gaps between the first seal 7 and the exhaust deflection means back into the oronasal
20 region to be inhaled by the user.

Exhaled air is exhausted to the ambient atmosphere via the air outlet 3. The air outlet 3 is fitted with a non-return valve and dead space (not shown) that inhibit ingress of contaminated air from the ambient atmosphere. Such valves and dead space
25 arrangements are known to those skilled in the art.

During operation of the respirator, the air pressure supply means provides air to the second cavity (the cavity between the first and second seals) in order to maintain a positive pressure relative to the ambient atmosphere and thus reduce the likelihood of ingress of contaminated air into the second cavity.

5

The sealing space 5 is shown in section in greater detail in figure 2 and comprises the first seal 7 connected to the second seal 6 and attachment lugs 9, 10. The sealing piece 5 comprises first and second portions 7, 6 each comprising a substantially compliant material and each having a respective sealing surface suitable for engagement with the face of a user so as to define a substantially sealed cavity between the sealing piece and the face of the user, the first and second portions 7, 6 being connected by a third portion 13 suitable for attachment to the surface of a respirator, the sealing piece further comprising a gas inlet for allowing, in use, the supply of pressurised gas to the cavity, wherein the first and second portions are so shaped that, in use, the application of a positive pressure in the cavity does not cause the seals to be broken. First seal 7 and second seal 6 are linked by a connecting section the surface 13 of which may be attached to the body of the respirator. Straps (not shown) may be attached to the attachment lugs 9, 10 to enable snug fitting of the respirator to the head of the user.

20

Figure 3 shows how the sealing piece of the present invention may be incorporated into a respirator. Figure 3a shows that the second and first seals 6, 7 may be incorporated into a one-piece component. Figure 3b shows that the seals 6, 7 may be separately attached to the body of the respirator. The one piece component 5 is advantageous, however, in that it allows both the first and second seal to be

25

incorporated into a relatively small space, reduces production costs and complexity and allows simple relative position of the first and second seals. The one-piece sealing component 5 is, of course, made in one piece. Figures 3c and 3d show further alternative embodiments of the arrangement of seals 6, 7.

5

The first seal 7 is a reverse reflex seal whereas second seal 6 is a standard reflex seal. On the application of a positive pressure within the cavity between the seals 6, 7, then the second seal 6 is urged into greater engagement with the face of the user.

10 Referring now to Figure 4, a valve assembly 20 comprises a valve body 25 having a valve assembly outlet and a valve assembly inlet, and a valve cavity 30 therebetween, a unidirectional valve mechanism 24 for permitting gaseous flow through the valve
assembly inlet into the valve cavity 30 and to the valve assembly outlet, a continuous
purge outlet 27 connectable to an air pressure supply means, an air deflector 28
15 spatially arranged in the valve cavity 30 relative to the unidirectional valve
mechanism 24 and the purge outlet 27 and is incident on the air deflector 28 such that
a curtain of air 22 may be substantially maintained above the unidirectional valve
mechanism 24.

20 A cylindrical bore has been formed in the valve body 25 to generate the valve cavity
30. The valve assembly 20 is shown located within a respirator air outlet 3 located
within a respirator facepiece 1. In use, exhaled air 21 is driven through the
unidirectional valve mechanism 24 that is located in the valve seat 23. The
unidirectional valve mechanism 24 is typically a membrane. The unidirectional valve
25 mechanism 24 inhibits flow of exhaled and ambient air through the valve assembly 20

into the respirator. A source of pressurised air, such as an air pump or bellows (not shown) is connected to the purge air inlet 31 that is in fluid communication with manifold 26. The manifold 26 is annular in shape and is in fluidic communication with purge outlet 27.

5

In use, the source of pressurised air provides pressurised air to the manifold 26. The pressurised air then passes to the purge outlet 27 that, in this case, is an annular shape. The outlet 27 is continuous around the circumference of the inner surface of the valve body 25. Air is urged from the purge outlet 27 in the form of a curtain of air 22 above
10 the unidirectional valve mechanism 24. Such an arrangement inhibits the accumulation of exhaled air 21 or ambient air in the region of the unidirectional valve mechanism 24 and urges and potentially contaminated air away from the user, thus reducing the likelihood of any unwanted gas ingress into the respirator. The purge outlet 27 should not be positioned too close to the unidirectional valve mechanism 24
15 since moving air creates regions of low pressure adjacent to the moving air. If such a region of low pressure is too close to the unidirectional valve mechanism 24, then the membrane of the mechanism lifts, thereby permitting air in the proximity of the valve mechanism 24 to be breathed in by the user. The shape and size of the purge outlet 27 dictate the angle at which the air is emitted from the purge outlet 27. The air deflector
20 28 enables the formation of a curtain of air 22 above the unidirectional valve mechanism 24. After passing through the purge outlet 27, the air is directed onto the air deflector 28. The position, shape and size of the air deflector 28 are chosen so that there is no or little turbulent air flow in the air emitted through the purge outlet 27 in the region above the unidirectional valve mechanism 27. The curtain of air 22 is

deflected by the air deflector 28 to conduit 41a. In the present case the air deflector 28 is cylindrical in shape.

The conduit 41a is one of six provided by a deadspace protection component 45 shown in detail in Figure 5. The air deflector 28 is shown in figure 5 merely to illustrate the spatial relationship between the air deflector 28 and the deadspace protection component 45. The air deflector 28 is not part of the deadspace protection component 45. The six conduits are provided by a series of 6 guide walls. For clarity and ease of reference only one conduit 41a and two guide walls 42a, 42b are labelled.

Exhaled air and the purging curtain of air pass to the inlet 46a of the conduit 41a. The walls 42a, 42b radiate from the central cavity of the valve assembly to the valve outlet 40a in a spiral manner. The spiralling nature of the conduit 41a increases the gaseous path length between the ambient atmosphere and the unidirectional valve mechanism 24, thus reducing the likelihood of unwanted ingress of ambient gas. The cross section of the conduit 41a decreases the closer the conduit is to the ambient atmosphere. This accelerates exhaled air and purging air outwards, thus reducing the likelihood of unwanted ambient gas ingress. The exhaled and purging air exits each conduit via a small outlet 40a. The conduit 41a is shaped so as to turn any exhaled and purging air, and more importantly any incoming air, out of the plane of the spiral.

This effectively turns the air through mutually perpendicular directions. This slows down any incoming air. The guide walls 42a, 42b are each provided with a radial projection 43a, 43b that slows any incoming air and helps to prevent a cyclonic motion of air from building-up within the valve assembly, should air be driven into the valve outlets. The use of multiple small valve outlets as opposed to one large vent decreases the risk of wind-blown ingress of ambient gas.

The curtain of air 22 may be provided continuously or during the inhalation process when ingress of contaminants is likely to occur.

Air deflector 28 may be provided with radically projecting vanes 47. These further
5 help to prevent the build-up of cyclonic air motion with the valve assembly 20.

One arrangement of the respirator of the first embodiment of the present invention is shown in Figure 6. The respirator air inlet 55 is, in use, in gaseous communication with the first cavity 52, thus forming a first gaseous pathway, a second air inlet 54 is
10 in gaseous communication with the air pressure supply means 53 which is capable, in use, of providing gas to the second cavity 51, thus forming a second gaseous pathway, wherein the respirator and second air inlets are located in common filter connection means 57, and the filter connection means 57 is connectable to a suitably adapted filter 60 such that in use the first and second gaseous pathways are mutually isolated
15 so that inhalation by the user does not substantially affect the pressure in the second gaseous pathway. Referring to figure 1, the first cavity 52 is formed between the first seal 7, the facepiece 1 and the face of the user. The second cavity 51 is formed between the second 6, the first seal 7 and a portion of the face of the user. A valve 56 is situated in the first gaseous pathway to prevent contaminated air from reaching the
20 first cavity 52. The filter 60 has been adapted to mate with the respirator of the present invention. The filter 60 comprises first and second filter air inlets 62, 63, filtration material 61, first and second filter air outlets 64, 65 and respirator connection means 66. The first and second filter air outlets 64, 65 are located in a common respirator connection means 66. In use, air is drawn through the first filter air
25 inlet 62, through the filtration material to the first filter air outlet 64. Air passes into

the respirator via the second air inlet 54 into the second cavity 51. Similarly, air is drawn through the second filter air inlet 63, through the filtration material to the second filter air outlet 65. Inhaling air is drawn from the second filter air outlet 65 to the respirator air inlet 55 into the first cavity 52 and then into the lungs of the user.

- 5 The gaseous pathway through the first filter air inlet to the first filter air outlet is isolated from that through the second filter air inlet to the second filter air outlet.

Thus, inhalation by the user does not affect the pressure in the second gaseous pathway and so the air pressure supply means 53 is not exposed to a drop in pressure
10 and thus does not have to increase its energy consumption in order to maintain the required pressure in the second cavity 51.

The respirator connection means comprises a means for engaging with the safety interlock of an attached respirator (not shown) such that the air pressure supply means
15 of the attached respirator may be actuated when the filter is properly fitted to the respirator. The filter to be fitted to the respirator may comprise suitable electrical contacts that mate with the contacts of the respirator so as to form a complete electrical circuit, thus permitting the air pressure supply means and thus the respirator to function. In the absence of the filter the air pressure supply means is left in open
20 circuit mode and thus the air pressure supply means cannot operate.

CLAIMS

1. A respirator comprising a respirator facepiece, a first sealing means suitable for forming a seal on the face of a user so as to define a first cavity between the first sealing means, the respirator facepiece and an area of the user's face comprising the eyes, mouth and nose, a second sealing means suitable for forming a seal on the face of the user so as to define a second cavity, the second cavity being formed between the second sealing means, the first sealing means, a portion of the face of the user and optionally the respirator facepiece, a respirator air inlet for conducting inhaling air to the first cavity, a respirator air outlet for conducting exhaled air from the first cavity, and an air pressure supply means suitable for supplying pressurised air to the second cavity whereby in normal operation air is inhaled and exhaled solely through the first cavity and so substantially no air pressure differential exists between the ambient atmosphere and the second cavity which will allow ambient air to enter the second cavity.

2. A respirator according to claim 1 further comprising at least one eyepiece and a means for directing inhaling air over the at least one eyepiece.

3. A respirator according to claim 2 further wherein the means for directing inhaling air over the at least one eyepiece is capable of diverting some of the inhaling air directly to the oronasal region of the user.

4. A respirator according to either of claims 2 and 3 further comprising exhaust deflection means capable of preventing exhaled air from contacting the at least one eyepiece.

5. A respirator according to claim 4 wherein the exhaust deflection means comprises a third sealing means that, in use, engages with the face of the user so as to form ocular and oronasal cavities, the third sealing means being provided with means
5 for permitting gaseous flow from the oronasal cavity to the ocular cavity.

6. A respirator according to any one preceding claim further comprising a valve assembly comprising a valve body having a valve assembly outlet and a valve assembly inlet, and a valve cavity therebetween, a valve mechanism for permitting
10 gaseous flow through the valve assembly inlet into the valve cavity and to the valve assembly outlet, a continuous purge outlet means connectable to an air pressure supply means, an air deflection means spatially arranged in the valve cavity relative to the valve mechanism and the purge outlet means such that, on connection and activation of a suitable air pressure supply means, air is emitted from the purge outlet
15 means and is incident on the air deflection means such that a curtain of air may be substantially maintained above the valve mechanism.

7. A respirator according to any one preceding claim wherein the respirator air inlet is, in use, in gaseous communication with the first cavity, thus forming a first
20 gaseous pathway, a second air inlet is in gaseous communication with the air pressure supply means which is capable, in use, of providing gas to the second cavity, thus forming a second gaseous pathway, wherein the first and second air inlets are located in a common filter connection means, and the filter connection means is connectable to a suitably adapted filter such that in use the first and second gaseous pathways are

mutually isolated so that inhalation by the user does not substantially affect the pressure in the second gaseous pathway.

8. A sealing piece for a respirator, the sealing piece comprising first and second
5 portions, each comprising a substantially compliant material and each having a
respective sealing surface suitable for engagement with the face of the user so as to
define a substantially sealed cavity between the sealing piece and the face of the user,
the first and second portions being mutually connected by a third portion suitable for
attachment to the surface of a respirator, the sealing piece further comprising a gas
10 inlet for allowing, in use, the supply of pressurised gas to the cavity, and wherein the
first and second portions are so shaped that, in use, the application of a positive
pressure in the cavity does not cause the seals to be broken.

9. A sealing piece according to claim 8 wherein, in use, the application of a
15 positive pressure in the cavity causes at least one of the first and second sealing
surfaces to be urged into a more positive engagement with the face of the user.

10. A sealing piece according to either of the claims 8 and 9 wherein the first and
second portions are locally J or U shaped in section.

20

11. A sealing piece according to any one of claims 8 to 10 wherein at least one of
the first and second portions comprises a reverse reflex seal.

12. A respirator comprising a sealing piece according to any of Claims 8 to 10.

25

13. A respirator substantially as hereinbefore described with reference to Figures 1 to 3 and 6 of the accompanying drawings.

THIS PAGE BLANK (USPTO)

1/6


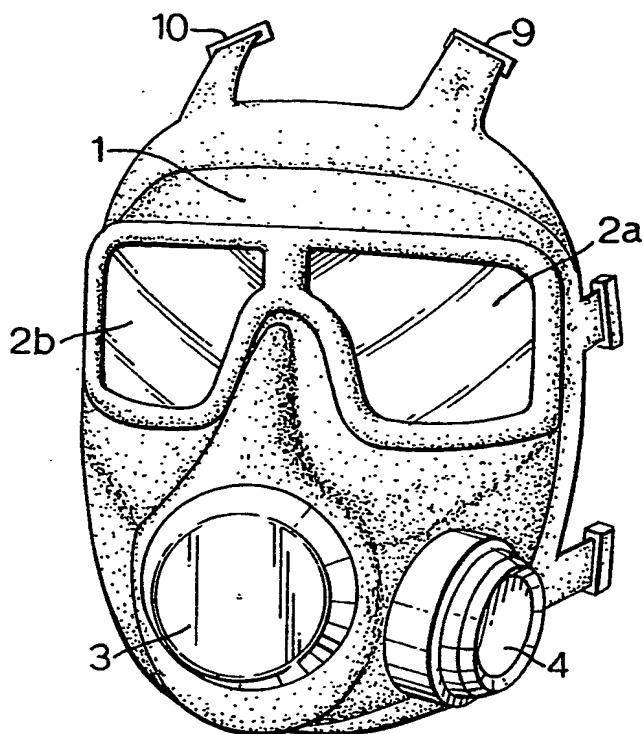



Fig.1.

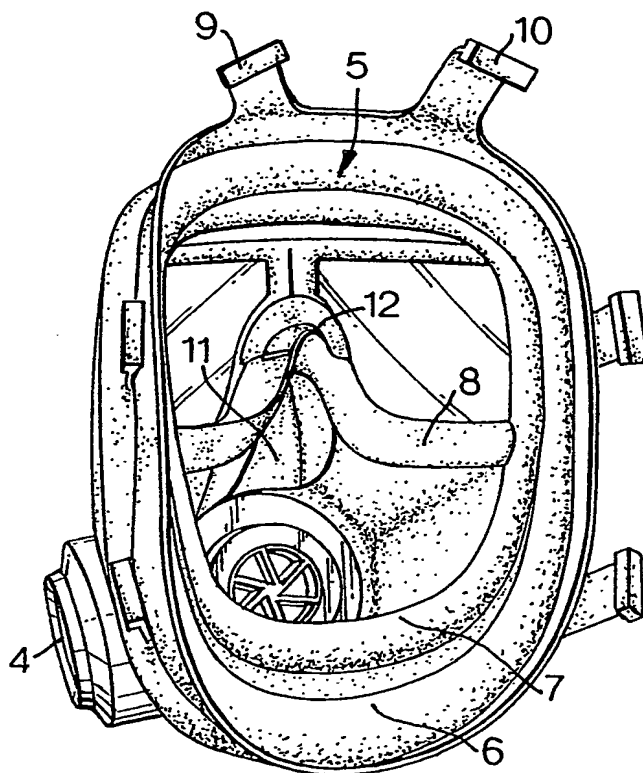

DISCLOSURE 12 8 53 2007

THIS PAGE BLANK (USPTO)

Fig.2.

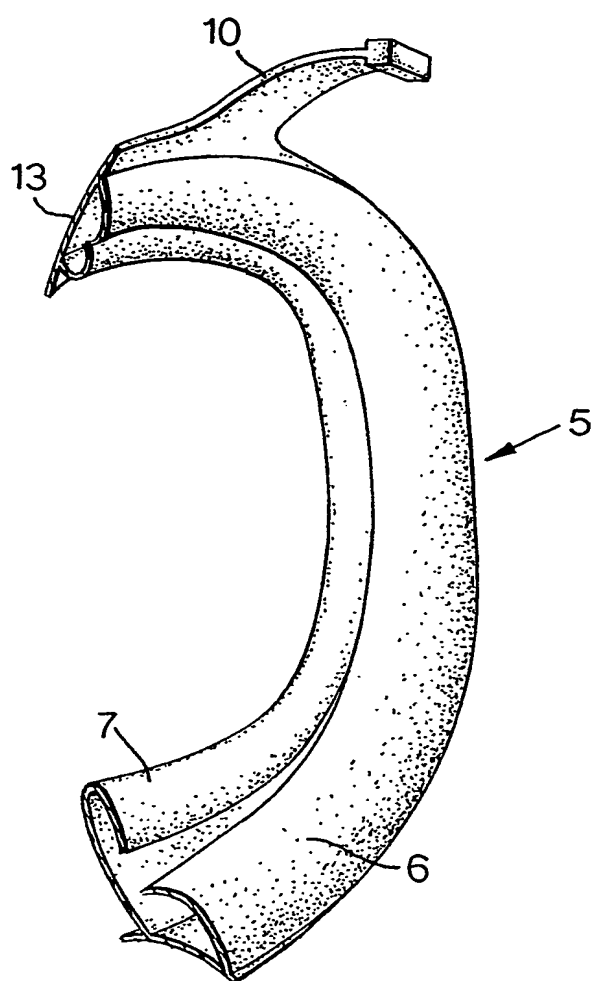

2011

THIS PAGE BLANK (USPTO)

3/6

Fig.3a.

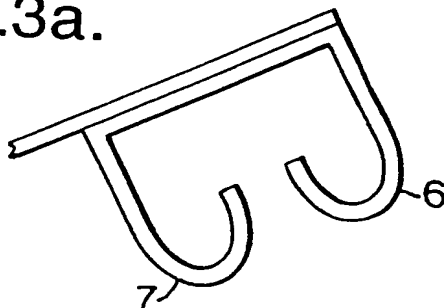


Fig.3b.

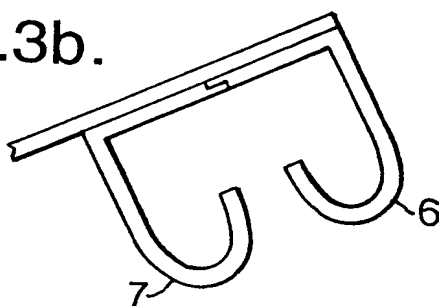


Fig.3c.


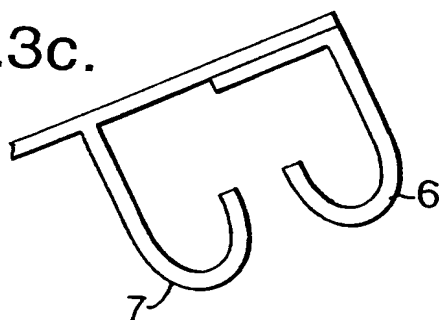


Fig.3d.

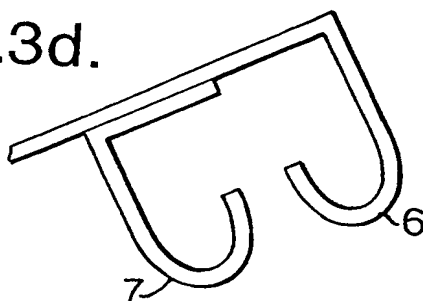


28 FEB 1964

THIS PAGE BLANK (USPTO)

4/6

Fig.4.

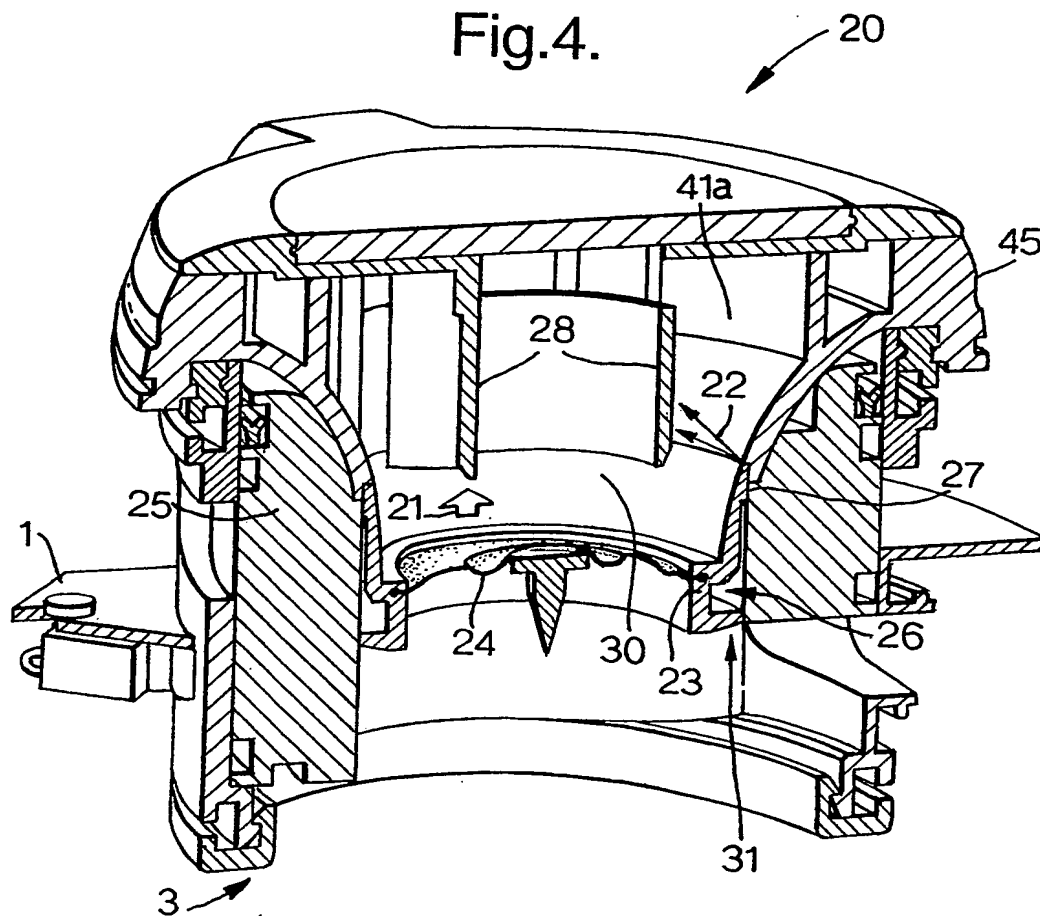

26 FEB 200

THIS PAGE BLANK (USPTO)

5/6


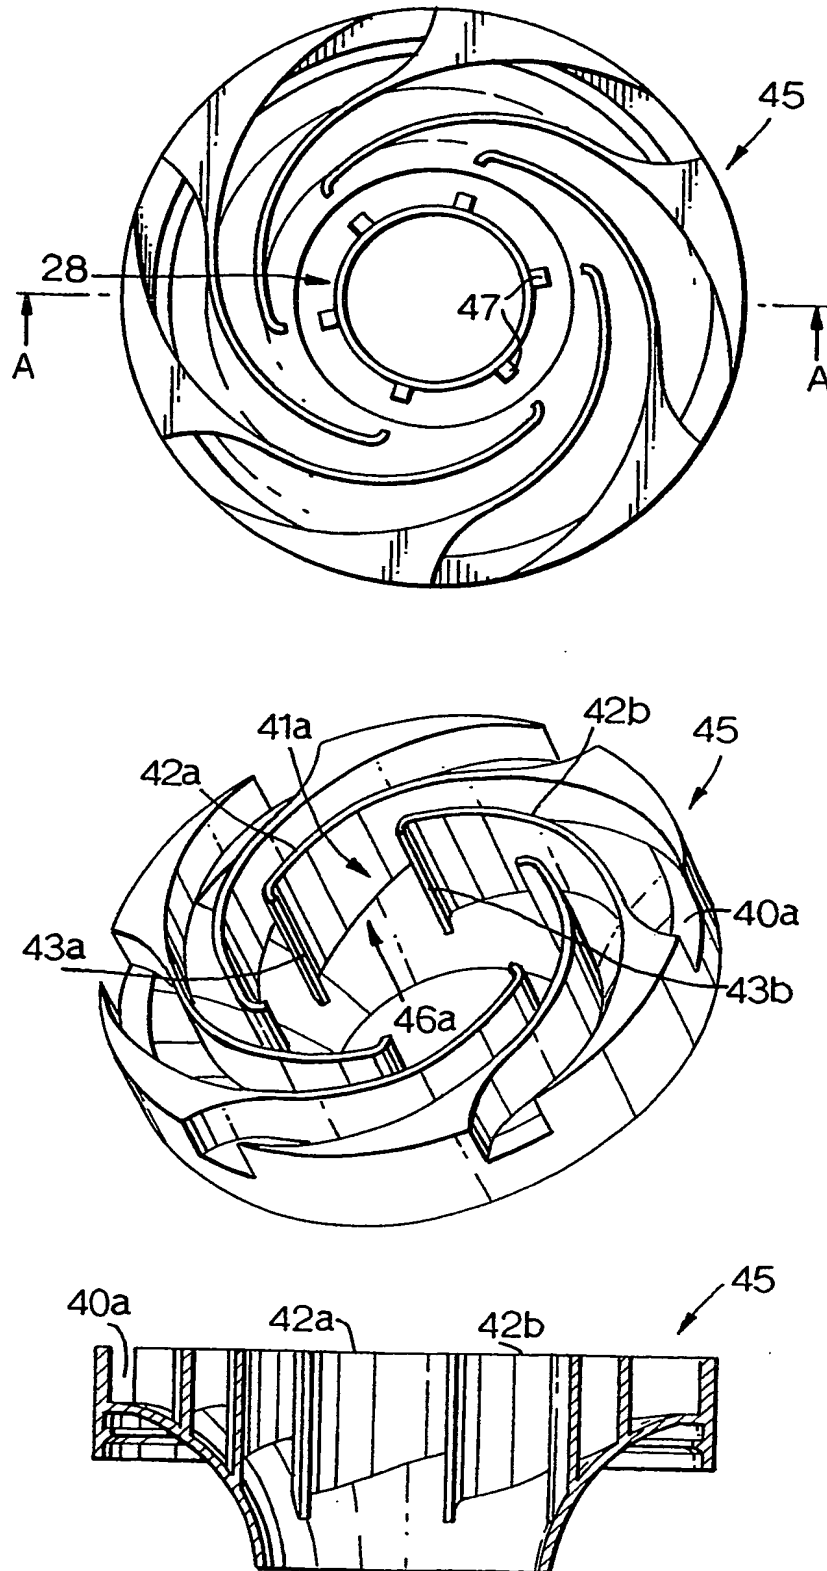


Fig.5.

DT15 Read FGT/FTO 28 FEB 2005

THIS PAGE BLANK (USPTO)

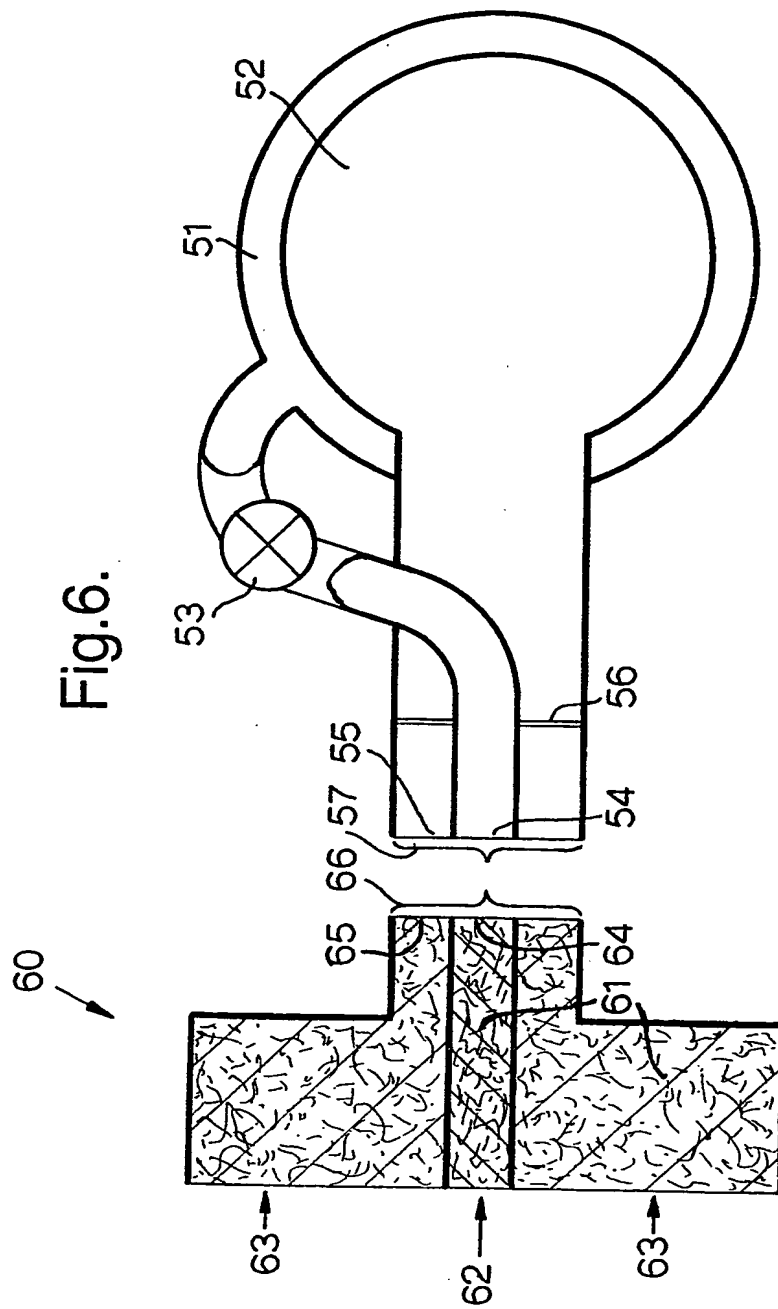

DT15 Rec'd FCT/PTO 28 FEB 2005

THIS PAGE BLANK (USPTO)

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/GB 03/04245

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 A62B18/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A62B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	GB 297 854 A (JOHN AMBROSE SADD) 1 December 1922 (1922-12-01) page 1, lines 42-48 - page 4, lines 10-44	1-5,8-12
Y	US 4 799 477 A (LEWIS RALPH H) 24 January 1989 (1989-01-24) the whole document	1,8
Y	US 3 680 555 A (WARNCKE ERNST) 1 August 1972 (1972-08-01) figure 1	1-4,8-12
Y	US 3 330 273 A (RAY BENNETT V) 11 July 1967 (1967-07-11) column 6, line 10-; figure 12	8-12
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

22 January 2004

Date of mailing of the international search report

30/01/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Schut, T

INTERNATIONAL SEARCH REPORT

International Publication No
PCT/GB 03/04245

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 02/11816 A (RICHARDSON GRANT STUART ; SECR DEFENCE (GB); MATHERS WILLIAM GEORGE (G) 14 February 2002 (2002-02-14) cited in the application	2-5
A	page 4., line 29, paragraph 3 - page 5, line 22	1,6,8
A	DE 11 81 554 B (AUERGESELLSCHAFT GES MIT BESCH) 12 November 1964 (1964-11-12) the whole document	6

INTERNATIONAL SEARCH REPORT

Internati application No.
PCT/GB 03/04245

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☒ Claims Nos.: 13
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
Claim 13 only contains references to the description of certain drawings.
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this International application, as follows:

see additional sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☒ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

International Application No. PCT/GB 03 04245

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

INTERNATIONAL SEARCH REPORT

International Application No
PCT/GB 03/04245

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
GB 297854	A	01-12-1922	NONE	
US 4799477	A	24-01-1989	NONE	
US 3680555	A	01-08-1972	DE 1914224 A1 CH 516314 A CS 178811 B2 FI 52429 B FR 2039795 A6 GB 1259232 A HU 168193 B IL 34098 A IT 951905 B NL 7003991 A SE 359030 B	24-09-1970 15-12-1971 31-10-1977 31-05-1977 15-01-1971 05-01-1972 28-03-1976 10-02-1975 10-07-1973 22-09-1970 20-08-1973
US 3330273	A	11-07-1967	NONE	
WO 0211816	A	14-02-2002	AU 7651101 A CA 2417734 A1 EP 1307265 A1 WO 0211816 A1 GB 2386075 A US 2003168060 A1	18-02-2002 14-02-2002 07-05-2003 14-02-2002 10-09-2003 11-09-2003
DE 1181554	B	12-11-1964	NONE	

THIS PAGE BLANK (USPTO)